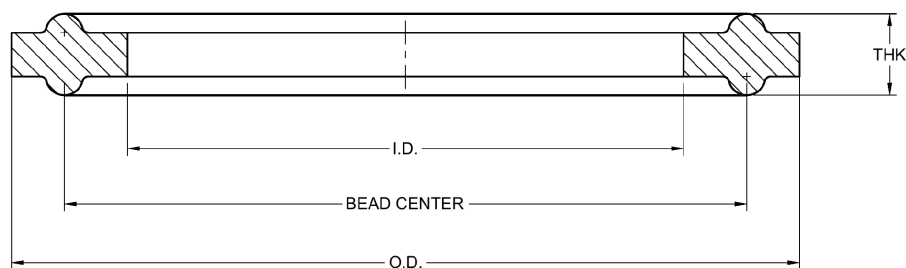


Tri-Clamp Gaskets

Dimensional data for standard (unflanged) and flanged clamp gasket profiles.

DIMENSIONAL DATA

Standard Clamp Gasket

40MP


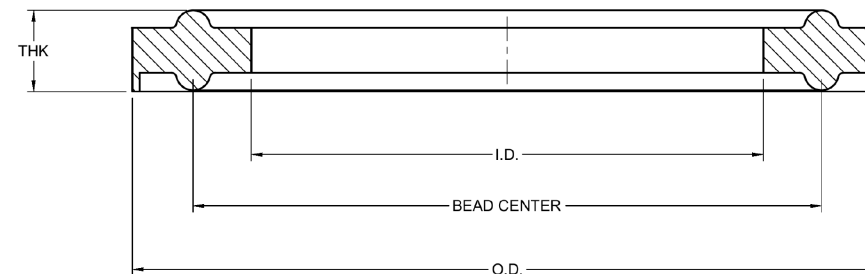
Approximate dimensions

mm (in)

Part number	Size	O.D.	I.D.	THK	Bead centre
40MP-X-X-1000	1.0 in	48.41 (1.984)	22.86 (0.900)	5.16 (0.203)	43.64 (1.718)
40MP-X-X-1500	1.5 in	48.41 (1.984)	35.56 (1.400)	5.16 (0.203)	43.64 (1.718)
40MP-X-X-2000	2.0 in	61.37 (2.515)	48.26 (1.900)	5.16 (0.203)	56.34 (2.218)
40MP-X-X-2500	2.5 in	74.42 (3.050)	60.96 (2.400)	5.16 (0.203)	70.64 (2.781)
40MP-X-X-3000	3.0 in	87.33 (3.579)	73.66 (2.900)	5.16 (0.203)	85.88 (3.381)
40MP-X-X-4000	4.0 in	114.24 (4.682)	98.27 (3.869)	5.16 (0.203)	110.34 (4.344)
40MP-X-X-6000	6.0 in	160.31 (6.570)	147.65 (5.813)	5.16 (0.203)	156.87 (6.176)
40MP-X-X-8000	8.0 in	209.11 (8.570)	198.45 (7.813)	6.05 (0.238)	207.39 (8.165)
40MP-X-X-10000	10.0 in	257.91 (10.570)	249.25 (9.813)	6.05 (0.238)	257.96 (10.156)
40MP-X-X-12000	12.0 in	306.71 (12.570)	300.05 (11.813)	6.05 (0.238)	308.64 (12.151)

Approx. dimensions of standard style gasket. Tolerances: ISO 3302-1 M2.

Flanged Clamp Gasket

40MPF


Approximate dimensions

mm (in)

Part number	Size	O.D.	I.D.	THK	Bead centre
40MPF-X-X-1000	1.0 in	52.07 (2.050)	22.17 (0.873)	5.58 (0.220)	43.64 (1.718)
40MPF-X-X-1500	1.5 in	52.07 (2.050)	35.56 (1.400)	5.58 (0.220)	43.64 (1.718)
40MPF-X-X-2000	2.0 in	65.79 (2.590)	47.75 (1.880)	5.58 (0.220)	56.33 (2.218)
40MPF-X-X-2500	2.5 in	79.76 (3.140)	60.45 (2.380)	5.58 (0.220)	70.64 (2.781)
40MPF-X-X-3000	3.0 in	92.71 (3.650)	72.90 (2.870)	5.58 (0.220)	83.34 (3.281)
40MPF-X-X-4000	4.0 in	121.16 (4.770)	97.79 (3.850)	5.58 (0.220)	110.34 (4.344)
40MPF-X-X-6000	6.0 in	168.28 (6.625)	146.94 (5.785)	5.58 (0.220)	156.36 (6.156)
40MPF-X-X-8000	8.0 in	219.71 (8.650)	197.74 (7.785)	5.08 (0.200)	207.26 (8.160)
40MPF-X-X-10000	10.0 in	271.78 (10.700)	247.90 (9.760)	5.08 (0.200)	257.56 (10.140)
40MPF-X-X-12000	12.0 in	322.58 (12.700)	298.70 (11.760)	5.08 (0.200)	308.48 (12.145)

Approx. dimensions of standard flanged style gasket. Tolerances: ISO 3302-1 M2.